

## **MULTICUT 650 PROLINE**



## **MULTICUT 650 PROLINE FEATURES**













1000rpm



2.70m / 8' 11"



6.28m / 15' 11"



250hp & 165hp







25mm - 210mm 1" - 8' 1/4"












## MULTICUT 650 PROLINE HIGH OUTPUT WITH THE CLEANEST FINISH

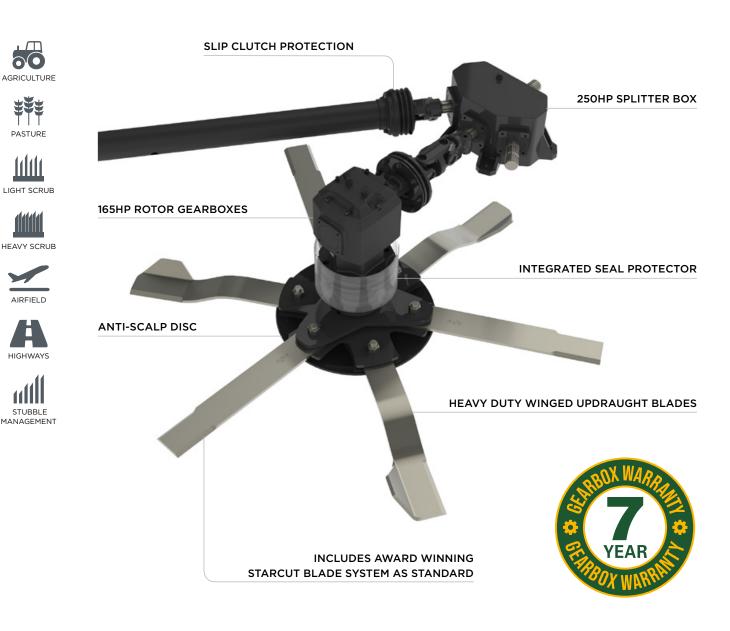

**PASTURE** 

LIGHT SCRUB

HIGHWAYS

The Multicut 650 PROLINE is boosted with additional output capability, enabling the comfortable clearance of more than 8 hectares per hour.

A walking axle design is standard across the full width of the machine delivering exceptional ground contour following and reduced shock loading in harsh field conditions.

Wider wheels are also fitted to add additional comfort and improved performance.

Spearhead's renowned durability is built into this mower and the evenness of spread from the five rotors is unrivalled leaving a clean finish and high output unmatched by competitive three rotor machines of the same width.

With a six gearbox driveline with more power than previously, with complete slip clutch protection on all driveshafts, the Multicut 650 PROLINE is designed to withstand the most demanding of work environments with exceptional reliability and durability certified with Spearhead's extended 7 year gearbox warranty whilst allowing enhanced forward speeds and fuel efficiency.

STANDARD SPECIFICATION	MULTICUT 650 PROLINE		
Machine weight*	3300kg / 7275lbs	Gearbox oil capacity	4.3 litres / 7.6 pints
Hitch	Multi-positional drawbar	[outer rotor gearboxes (x2)]	· ·
Cutting width	6.28m / 20' 7"	Deck construction	All welded construction
Working machine width	6.47m / 21' 3"	Deck material thickness	6mm (1/4")
Transport machine width	2.70m / 8' 11"	Side skirt material thickness	5mm (3/16")
Maximum working length	5.07m / 16' 8"	Skid construction	Replaceable bolt on skid shoes
Transport length	4.93m / 16' 3"	Anti-scalp dish [centre rotor + inner wing rotors]	6mm (1/4") round pan with blade holder bar
Deck height**  Transport height	0.23m / 9" 2.90m / 9' 7"	Anti-scalp dish [outer wing rotors]	5mm (3/16") round pan with blade holder bar
Cutting height Cutting capacity	25mm - 210mm (1" - 8 1/4") 100mm / 4"	Blades (x15)	12mm (1/2") 30 Carbon Boron hardened and tempered. Free swinging high lift – low friction
Recommended tractor HP Wing working angles Power take-off speed	90hp / 67kW 45° up / 15° down 1000rpm	Blades Starcut (x15)	12mm (1/2") 30 Carbon Boron hardened and tempered. Free swinging – low friction. Non-handed.
Gearbox [splitter]	Cast Iron housing	Blade tip speed (1000rpm)	79mps / 15551fpm
Gearbox [rotor gearboxes (x5)]	Cast Iron housing	Driveline	ASAE Category 6
Input shaft	1-3/8" Z21 or Z6 SFT 8 tractor end	Driveline protection	2/4-way slip clutches on rotor gearboxes. Overrun on input shaft
Gearbox lubricant [splitter]	EP80-90W or GL-4 / GL-5 oil		
Gearbox lubricant [rotor]	85W-140 oil	Tailwheel mount assemblies	Tubular welded walking axles
Gearbox oil capacity [splitter gearbox]	2.7 litres / 4.7 pints	Tailwheels (x8)	21x9 14 PLY pneumatic tyre with steel rim
Gearbox oil capacity [centre + inner rotor gearboxes (x3)]	4.3 litres / 7.6 pints	Front guard Rear guard	Single chain guards on each deck Single chain guards on each deck

<sup>\*</sup> With front and rear single chain guards \*\* Underside of deck to skid



Station Road, Salford Priors, Evesham, Worcestershire, WR11 8SW, England 5+44 (0)1789 491860

